arXiv:physics/0209019v1 [physics.atom-ph] 5 Sep 2002

Precise fine-structure and hyperfine-structure measurements in Rb

Ayan Banerjee, Dipankar Das, and Vasant Natarajan*
Department of Physics, Indian Institute of Science, Bangalore 560 012, INDIA

Abstract

We demonstrate a new technique for measuring the absolute frequencies of atomic transitions. The technique uses a ring-cavity resonator whose length is calibrated using a reference laser locked to the D_2 line in ^{87}Rb. The frequency of this line is known to be 384 230 484.468(10) MHz. Using a second laser locked to the D_1 line of Rb, we measure the frequencies of various hyperfine transitions in the D_1 and D_2 lines with a precision of 30 kHz. We obtain the following values: 120.687(17) MHz and 406.520(25) MHz for the $5P_{1/2}$ hyperfine constant A in ^{85}Rb and ^{87}Rb; 377 107 385.623(50) MHz and 377 107 463.209(50) MHz for the D_1 line in ^{85}Rb and ^{87}Rb; and 384 230 406.528(50) MHz for the D_2 line in ^{85}Rb. This yields the fine-structure interval and the isotope shifts. The precision obtained is a significant improvement over previous measurements.

Typeset using REVTEX

*Electronic address: vasant@physics.iisc.ernet.in

Precise measurements of atomic energy levels continue to play an important role in the development of physics. The energy levels of alkali atoms are particularly important because of their widespread use in laser-cooling experiments, ultra-cold collision studies, photoassociation spectroscopy, atomic tests of parity violation, and more recently in Bose-Einstein condensation. For example, measurement of the D_1 line in Cs can lead to an improved value for the fine-structure constant α [1]. In addition, knowledge of the fine-structure interval in the D line of alkali atoms is important for several reasons, *e.g.* in the study of atomic collisions, astrophysical processes, and relativistic calculations of atomic energy levels.

In this Letter, we demonstrate a new technique for precisely measuring the energy levels of atoms. The technique combines the advantages of using diode lasers to access atomic transitions with the fact that the absolute frequency of the D_2 line in ^{87}Rb has been measured with an accuracy of a few kHz [2]. A stabilized diode laser locked to the D_2 line of ^{87}Rb is used as a frequency reference along with a ring-cavity resonator whose length is measured with the reference laser. For a given cavity length, an unknown laser locked to an atomic transition has a small frequency offset from the nearest cavity resonance. This offset acts as a vernier scale and is combined with the cavity mode number to obtain a precise value for the frequency of the unknown laser. We have used this method to make precise measurements of energy levels in the D lines of Rb. This yields the hyperfine structure in the $5P_{1/2}$ state and the $D_1 - D_2$ fine-structure interval. We demonstrate a precision of 30 kHz, which is two to three orders of magnitude better than the typical accuracy of energy-level tables [3]. While we have measured energy levels only in Rb, the technique is more general and should prove useful in other alkali atoms (such as Li, K, and Na), alkali-like ions, and indeed any system where the transitions are accessible with tunable lasers.

Similar measurements have been done previously using a stabilized HeNe laser as the frequency reference and a linear Fabry-Perot resonator [4]. Our use of a Rb-stabilized diode laser as the reference has the primary advantage that there are several hyperfine transitions that can be used for locking the laser. This enables us to check different sources of systematic errors. Our use of a ring-cavity resonator also has several advantages. The main problem with a linear resonator is that it can cause unwanted feedback into the diode laser and destabilize it. By contrast, the ring-cavity resonator has a traveling wave inside the cavity and there is no possibility of feedback into the laser. The other advantages of the ring cavity are: i) The cavity provides three output beams that can be used to measure the cavity signal. ii) The mode structure inside the cavity is elliptical which makes it easier to mode-match the elliptical output of the diode laser into the cavity. iii) For a given cavity length, the design is more compact and the cavity is easily temperature stabilized to increase its passive stability.

The schematic of the experiment is shown in Fig. 1. The experiment uses two diode lasers that are both locked to hyperfine transitions in Rb using Doppler-free saturated-absorption spectroscopy. Laser 1 is on the D_1 line (whose frequency has to be measured) and Laser 2 is on the D_2 line (which acts as the frequency reference). The output of the two lasers is fed into the ring-cavity resonator. In general, the length of the cavity is such that the cavity is not in resonance with either laser. The cavity length is adjusted using a piezo-mounted mirror to bring it into resonance with the wavelength of Laser 1. The cavity is then locked to this length in a feedback loop. However, Laser 2 will still be offset from the

cavity resonance. This offset is accounted for by shifting the frequency of the laser using an acousto-optic modulator (AOM) before it enters the cavity. The error signal between the shifted frequency of Laser 2 and the cavity resonance is fed back to the AOM driver which locks the frequency of the AOM at the correct offset. The frequency of the AOM is read using a frequency counter and thus the exact offset between the two lasers is determined. The absolute frequency of Laser 2 is known with 10 kHz accuracy [2], therefore, once the cavity length (or mode number) is known, the frequency of Laser 1 is determined very precisely.

The relevant low-lying energy levels for the two isotopes of Rb are shown in Fig. 2. The various hyperfine levels in the ground and excited states are given along with their energy shifts from the unperturbed state. Knowledge of the shift is important in obtaining the hyperfine-free transition frequency. The ground-state shifts are known with sub-kHz accuracy [5]. The shifts in the $5P_{3/2}$ state have been measured with an accuracy of 50 kHz for ^{85}Rb [6] and with an accuracy of 10 kHz for ^{87}Rb [2]. However, for the $5P_{1/2}$ state, the values have large error bars of order 1 MHz [5]. In this work, we have improved these values by one to two orders of magnitude.

The diode lasers are standard external-cavity lasers stabilized using optical feedback from a piezo-mounted grating [7]. Large scans of the laser frequency are possible by changing the angle of the grating. The current through the diodes is dithered at a frequency of 10–50 kHz to produce the error signal needed for locking. The ring cavity consists of two plane mirrors and two concave mirrors in a bow-tie arrangement. One of the plane mirrors is partially reflecting (97%) and is used to couple light into the cavity. The other plane mirror is mounted on a piezoelectric transducer and is used to adjust the cavity length electronically. The two concave mirrors have radius of curvature of 25 mm. They are placed 26.5 mm apart, while the optical path length between them through the plane mirrors is 200 mm. The angle of incidence on all mirrors is 15°. The mirrors are mounted on a copper plate that is temperature controlled to ± 0.01°C using a thermoelectric cooler. The primary mode of the cavity has two beam waists, both of which are elliptical because of the non-zero angle of incidence on the curved mirrors. The large waist between the plane mirrors is used for efficient mode matching. The elliptic beams from the diode lasers are mode matched into the cavity using a convex lens.

The signal from a scan of Laser 2 is shown in Fig. 3. The upper trace is the power transmitted through the cavity, while the lower trace is the signal from the saturated-absorption spectrometer. The cavity length was fixed by locking it to Laser 1. It is seen from the figure that the hyperfine peaks are slightly shifted from the nearest cavity resonance. This is the shift that is accounted for by the AOM. The laser is locked to one of the peaks in the saturated-absorption spectrum using third-harmonic locking. This eliminates any systematic shift in the lock point due to the underlying Doppler profile in the spectrum. Note that the spectrum shown in the figure has the Doppler profile subtracted. Laser 1 is similarly locked to the saturated-absorption spectrum of the D_1 line using the third-derivative signal. However, locking to the cavity is to the standard first-derivative signal since this signal appears on a flat background.

The measurements rely on the fact that the cavity mode number for each laser is known exactly. For Laser 2, we determine it in the following manner. We first fix the cavity length by locking it to Laser 1. We then find the frequency offsets for two hyperfine transitions of Laser 2: $F = 1 \rightarrow F' = (1, 2)$ and $F = 2 \rightarrow F' = (2, 3)$. From Fig. 2, the frequency difference

between these two transitions is exactly 6622.887(10) MHz. Since the cavity free-spectral range is about 1324 MHz, this corresponds to an increase in mode number by 5. Therefore, the two measured offsets are combined with the known shift to give a precise measurement of the cavity free spectral range. This determines the mode number uniquely. Once the mode number for Laser 2 is known, it is easy to find the mode number for Laser 1 as long as we know its frequency with an accuracy of about 50 MHz. This coarse measurement is done using a home-built wavemeter [7]. Note that the cavity length on resonance is an integer multiple of the laser *wavelength*, therefore, we have to account for the refractive index of air [8] when converting from frequency to wavelength.

The measurements of various hyperfine transitions are listed in Table I. Each value is an average over 50 individual measurements and the error given is the statistical error in the average. Systematic errors in the data can arise if there is any shift in the lock point of the lasers from the peak and optical-pumping effects from stray magnetic fields that change the lineshape of the spectrum. To check for such errors, we have repeated the same measurement using different hyperfine transitions for locking the reference laser. For example, measurements 1 and 2 in Table I are measurements of the same transition with the reference laser on the $F = 1 \rightarrow F' = 1$ and $F = 2 \rightarrow F' = (1, 3)$ transitions, respectively. If there is any systematic shift in the lock point of the reference laser, this would appear as a difference in the two values. Similarly, 3 and 4 are independent measurements of the same transition. Finally, 7 and 8 are measurements of the D_2 line in ^{85}Rb. For these two measurements, the role of the lasers is reversed since the unknown laser is on the D_2 line and Laser 1 acts as the reference laser. We use our measured values for the D_1 line to obtain these values. These two measurements act as another check on the propagation of systematic errors since the difference between these values should be 31.705(50) MHz from Fig. 2. These checks on systematic errors enable us to estimate the size of the error in the individual frequencies to be no larger than 30 kHz. In what follows, the errors quoted include 30 kHz of systematic error.

We first analyze our results in terms of the hyperfine structure of the D_1 line. Using the measured interval between the two hyperfine levels in the $5P_{1/2}$ state, we extract the value of the hyperfine constant A in each isotope. The results are shown in Fig. 4. The values we obtain are 120.687(17) MHz for ^{85}Rb and 406.520(25) MHz for ^{87}Rb. Also shown in the figure is the comparison to earlier values: the recommended values of Arimondo et al. obtained from fitting to all the available data [5], and the more recent results of Barwood et al. using a HeNe-stabilized Fabry-Perot interferometer [4]. Our results are consistent with the values of Arimondo et al. but have 2 to 3 orders of magnitude better accuracy. However, our values differ significantly from those reported by Barwood et al. even though their claimed error bars are slightly smaller. Note that their values also appear inconsistent with the recommended values.

We have also obtained the frequencies of the hyperfine-free D lines and the fine-structure interval in Rb using the data from Table I. The results of this analysis are shown in Table II. The isotope shift is 77.586(70) MHz in the D_1 line and is 77.940(50) MHz in the D_2 line. The fine-structure interval is 7 123 020.905(70) MHz in ^{85}Rb and 7 123 021.259(50) MHz in ^{87}Rb, yielding a value of 0.354(90) MHz for the isotope shift in the interval. The accuracy of these values is significantly better than what has been reported earlier. The D-line frequencies in the published atomic energy tables have an accuracy of 300 MHz [3]. Barwood et al. [4]

have reported a value of 377 106 271.6 MHz for the D_1 line of ^{85}Rb ($F = 3 \rightarrow F' = 3$) with an error of 0.4 MHz. Our values for the same transition (measurements 1 and 2 in Table I) are consistent but the accuracy is an order of magnitude better. For the fine-structure interval, we have earlier reported a value of 7 123 069(18) MHz using a scanning Michelson interferometer [9], which overlaps with the current result at the 2.5σ level. To the best of our knowledge, there are no other measurements of the fine-structure interval.

In conclusion, we have demonstrated a new technique for measuring the absolute frequencies of atomic transitions using a Rb-stabilized ring-cavity resonator. We have measured the frequencies of the D lines in the two isotopes of Rb and significantly improved the precision of the fine-structure interval. We have also obtained improved values for the hyperfine structure in the $5P_{1/2}$ state. The main advantage of using a Rb-stabilized diode laser as the frequency reference is that it has several hyperfine transitions available for locking the laser, and the frequency shifts of these hyperfine levels are known very precisely. This is useful in measuring the mode number of the cavity. It also allows us to make several checks on systematic errors by making independent measurements of the same transition with different lock-points of the reference laser. We believe that this technique has the potential to improve the accuracy of atomic energy-level tables by several orders of magnitude. To demonstrate this, we plan to measure transitions in other atoms such as K and Yb.

We are grateful to Jhilam Sadhukhan for help with the measurements. This work was supported by research grants from the Board of Research in Nuclear Sciences (DAE), and the Department of Science and Technology, Government of India.

REFERENCES

[1] T. Udem, J. Reichert, R. Holzwarth, and T. Hänsch, Phys. Rev. Lett. **82**, 3568 (1999).
[2] J. Ye, S. Swartz, P. Jungner, and J. L. Hall, Opt. Lett. **21**, 1280 (1996).
[3] C. E. Moore, Natl. Stand. Ref. Data Ser. **35**, 180 (1971).
[4] G. P. Barwood, P. Gill, and W. R. C. Rowley, Appl. Phys. B **53**, 142 (1991).
[5] E. Arimondo, M. Inguscio, and P. Violino, Rev. Mod. Phys. **49**, 31 (1977).
[6] U. Rapol, A. Krishna, and V. Natarajan, to be published (2002).
[7] A. Banerjee, U. Rapol, A. Wasan, and V. Natarajan, Appl. Phys. Lett. **79**, 2139 (2001).
[8] B. Edlén, Metrologia **2**, 71 (1966).
[9] A. Banerjee, U. Rapol, and V. Natarajan, Appl. Phys. Lett. **80**, 3688 (2001).

FIGURES

FIG. 1. Schematic of the experiment. The output of the two diode lasers is compared in the ring-cavity resonator. Laser 1 is the unknown laser locked to an atomic transition on the D_1 line. The cavity is locked to Laser 1. Laser 2 is the reference laser on the D_2 line. Its output is frequency shifted using the AOM before being fed into the cavity. The error signal between the shifted frequency and the cavity resonance is fed back to lock the AOM frequency. The frequency of the AOM gives the exact offset between the Laser 2 frequency and the cavity resonance.

FIG. 2. Rb energy levels. Shown are the relevant energy levels of ^{85}Rb and ^{87}Rb in the ground and excited states. The various hyperfine levels are labeled with the value of the total angular momentum quantum number F, and the number on each level is the hyperfine shift (in MHz) from the unperturbed state.

FIG. 3. Cavity modes. The upper trace shows the power in the cavity as the frequency of the Laser 2 is scanned and the lower trace shows the output of the saturated-absorption spectrometer. The length of the cavity is locked to Laser 1. The different hyperfine transitions in the D_2 line are at different offsets from the nearest cavity mode, which is accounted for using the frequency shift in the AOM. The two cavity modes are labeled with their mode number.

FIG. 4. Hyperfine measurements. In (a), we compare our value of the $5P_{1/2}$ hyperfine constant A in ^{85}Rb to earlier values from Arimondo et al. [5] and Barwood et al. [4]. The inset shows the hyperfine shifts inferred from our measurements. In (b), we show analogous results for ^{87}Rb.

TABLES

TABLE I. The table lists the measured frequencies of the various transitions. The errors are statistical (1σ) deviations. Measurements 1 and 2 are independent measurements of the same transition using different hyperfine transitions for the reference laser. They act as a check on systematic errors. Similarly, 3 and 4 are independent measurements. Measurements 7 and 8 are measurements of the D_2 line in ^{85}Rb whose difference should be 31.705(50) MHz.

Measured transition	Frequency (MHz)
1. D_1 line: ^{85}Rb, $F = 3 \rightarrow F' = 3$	377 106 271.606(13)
2. D_1 line: ^{85}Rb, $F = 3 \rightarrow F' = 3$	377 106 271.560(21)
3. D_1 line: ^{85}Rb, $F = 3 \rightarrow F' = (2, 3)$	377 106 090.542(16)
4. D_1 line: ^{85}Rb, $F = 3 \rightarrow F' = (2, 3)$	377 106 090.601(22)
5. D_1 line: ^{87}Rb, $F = 2 \rightarrow F' = 1$	377 104 392.053(21)
6. D_1 line: ^{87}Rb, $F = 2 \rightarrow F' = 2$	377 105 205.093(18)
7. D_2 line: ^{85}Rb, $F = 3 \rightarrow F' = 3$	384 229 121.099(14)
8. D_2 line: ^{85}Rb, $F = 3 \rightarrow F' = (2, 3)$	384 229 089.320(19)

TABLE II. The table lists the frequencies of the D_1 line, D_2 line, and fine-structure interval in the two isotopes of Rb. Also given are the isotope shifts. The values are obtained from an analysis of the data in Table I and the errors are a combination of statistical and systematic errors.

	^{85}Rb (MHz)	^{87}Rb (MHz)	Isotope shift (MHz)
D_1 line	377 107 385.623(50)	377 107 463.209(50)	77.586(70)
D_2 line	384 230 406.528(50)	384 230 484.468(10)[a]	77.940(50)
F.S. Interval	7 123 020.905(70)	7 123 021.259(50)	0.354(90)

[a]From Ref 2

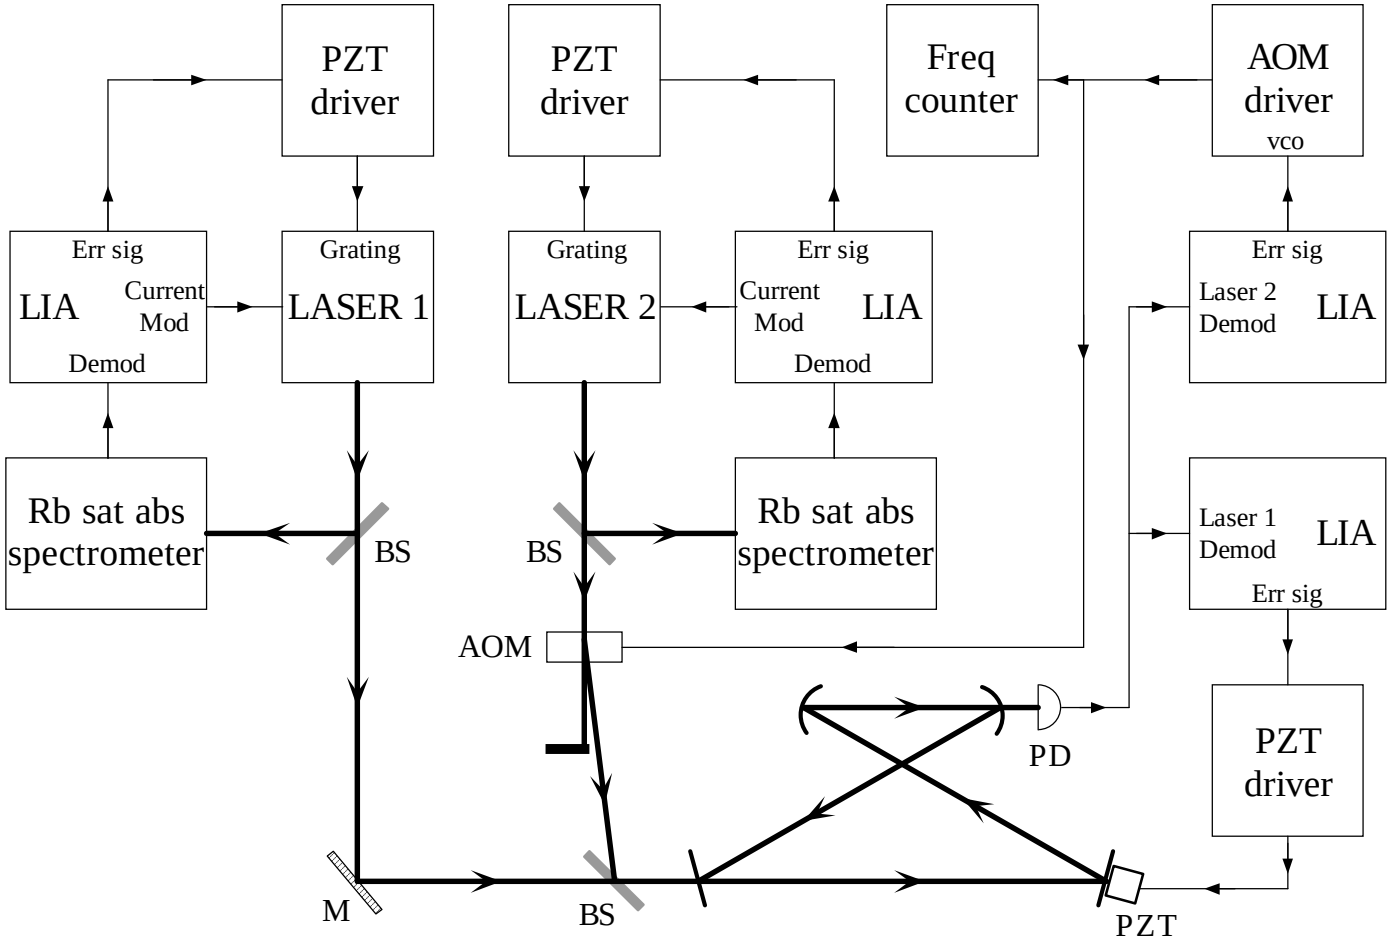
PZT driver
PZT driver
Freq counter
AOM driver
vco
Err sig
LIA
Current Mod
Demod
Grating
LASER 1
Grating
LASER 2
Err sig
Current Mod
LIA
Demod
Err sig
Laser 2 Demod
LIA
Rb sat abs spectrometer
BS
BS
Rb sat abs spectrometer
Laser 1 Demod
LIA
Err sig
AOM
PD
PZT driver
M
BS
PZT

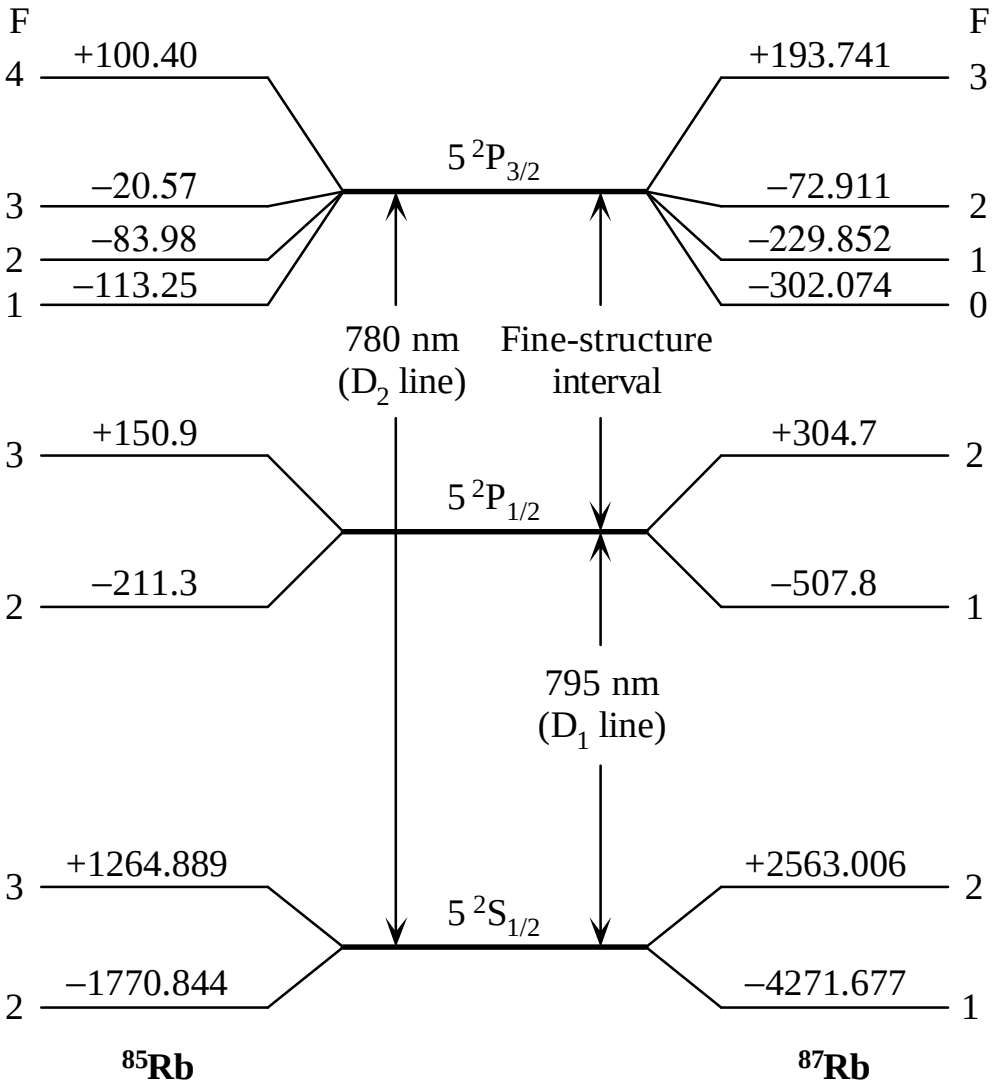
F
4
+100.40
3
−20.57
2
−83.98
1
−113.25
5 2P3/2
+193.741
F
3
−72.911
2
−229.852
1
−302.074
0
780 nm
(D2 line)
Fine-structure
interval
3
+150.9
2
−211.3
5 2P1/2
+304.7
2
−507.8
1
795 nm
(D1 line)
3
+1264.889
2
−1770.844
5 2S1/2
+2563.006
2
−4271.677
1
85Rb
87Rb

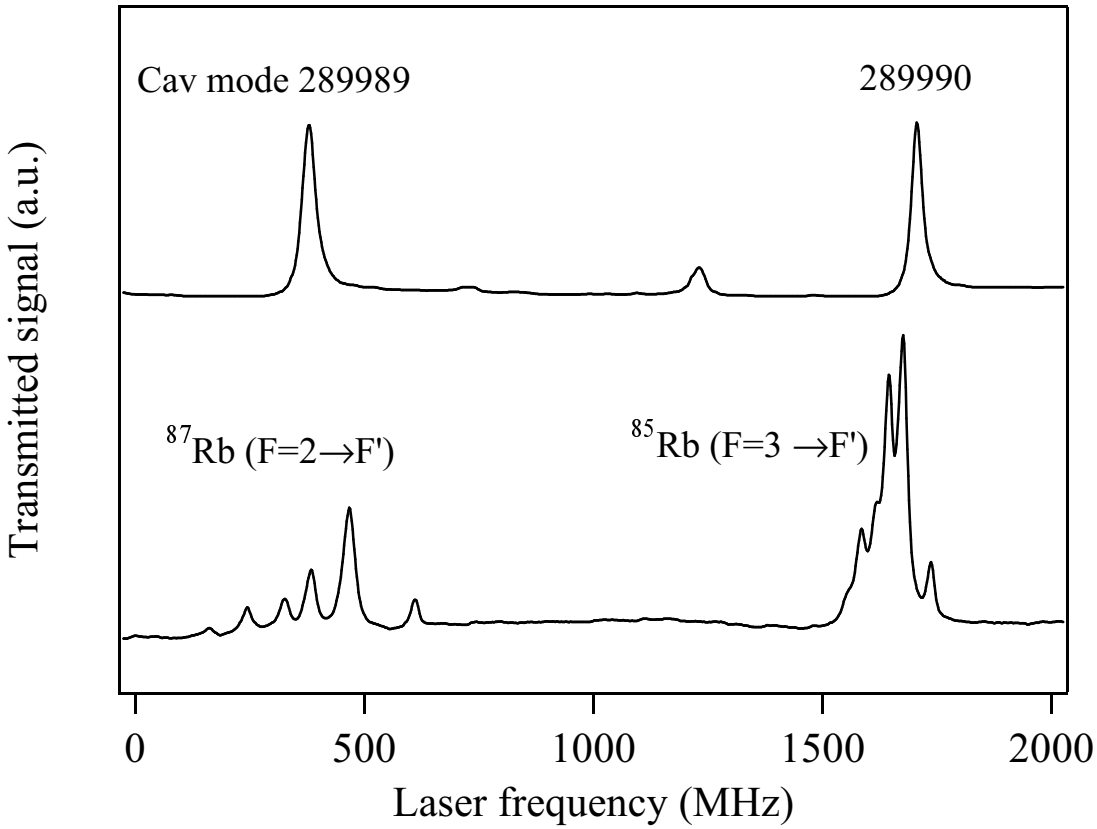
Cav mode 289989
289990
^{87}Rb (F=2→F')
^{85}Rb (F=3 →F')
Transmitted signal (a.u.)
0
500
1000
1500
2000
Laser frequency (MHz)

a) ^{85}**Rb,** $5^2P_{1/2}$ **Hyperfine constant A**

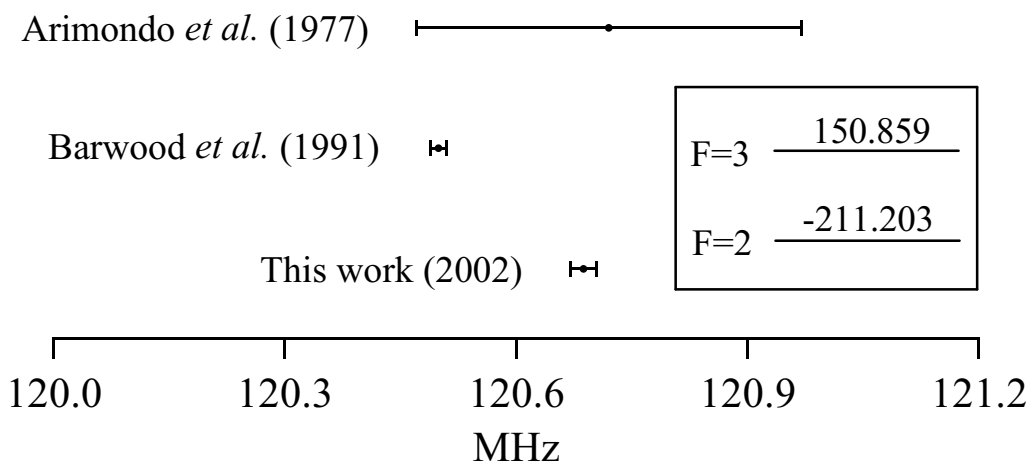

b) ^{87}**Rb,** $5^2P_{1/2}$ **Hyperfine constant A**